

IMPORTANT- RETAIN FOR FUTURE REFERENCE
PLEASE READ CAREFULLY



Boori International

AUSTRALIA
 27-37 Vallance Street
 St Mary's NSW
 2760 Australia
 Ph: 02 9833 3769 Fax: 02 9673 4240

Boori UK Limited

UNITED KINGDOM
 Wells house, Unit 5
 Woolley Barns, Woolley
 Wantage, OX12 8TA UK
 Ph: 44 14 8863 9500 Fax: 44 14 8863 9505








B 2 Y


Baby to Youth

Cot / King Single Bed

2 x Allen Keys

Cot hardware and parts list

4 x Drop side glide pins	12 x Wooden dowels	16 x 20mm Connecting bolts	4 x 40mm Connecting bolts	8 x 54mm Connecting bolts	4 x 70mm Connecting bolts	4 x 80mm Connecting bolts
A 	B 	C 	E 	G 	I 	J 

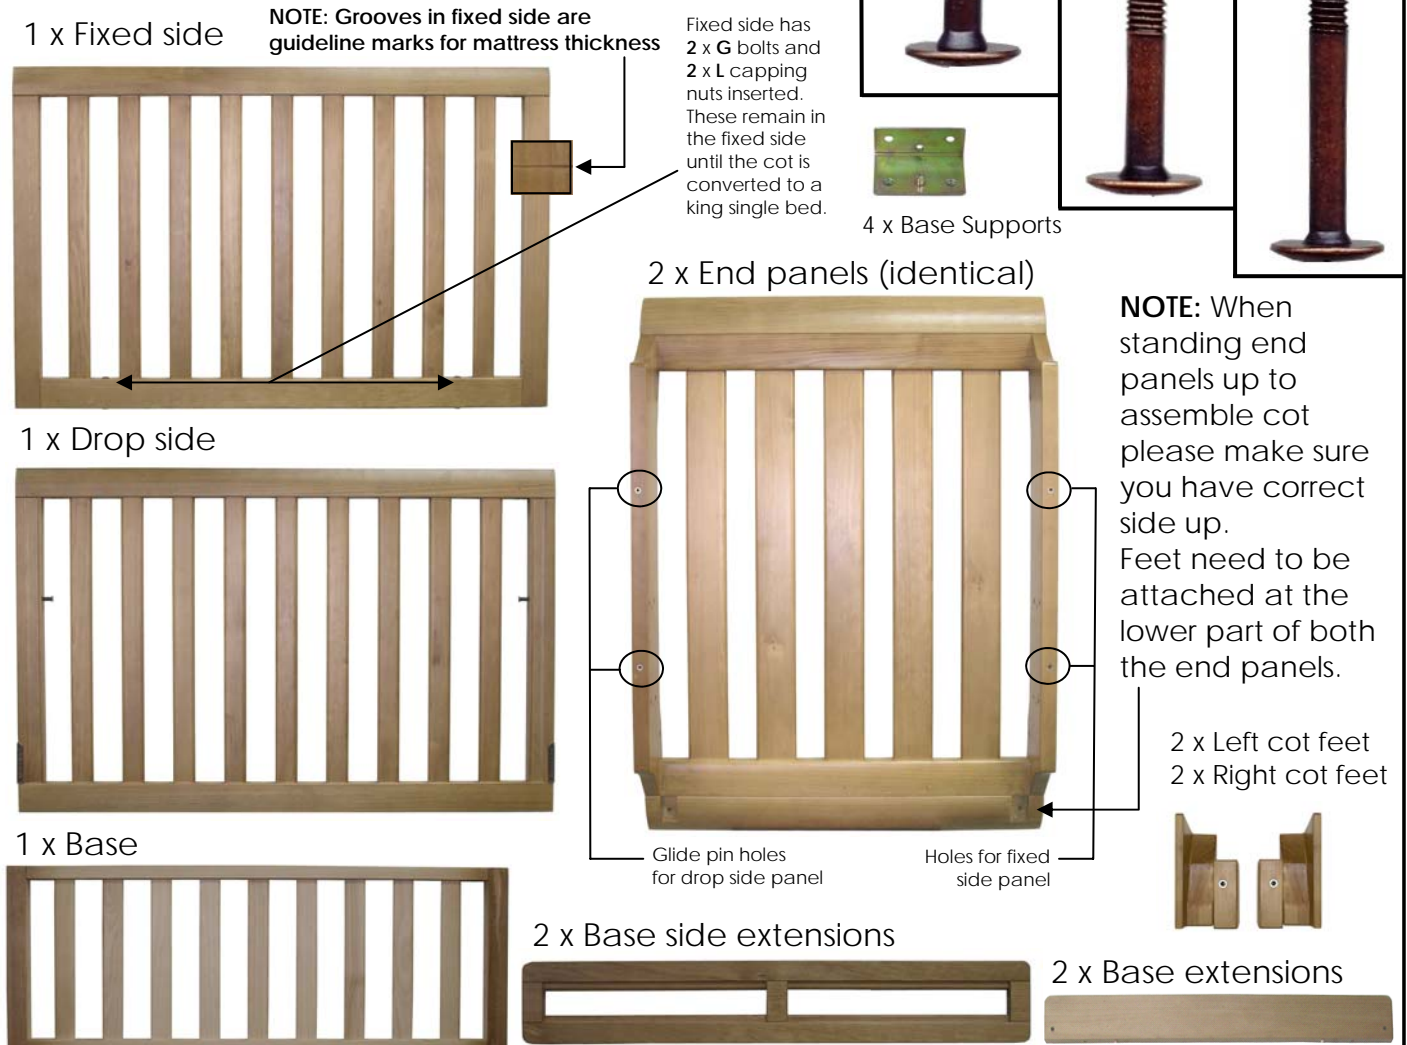



Boori COT/JUNIOR BED assembly instructions

FOR AUSTRALIA AND NEW ZEALAND

(AS/NZS 2172:2003)

RECOMMENDED MATTRESS SIZE 1310mm X 750mm X 110mm

This cot has been manufactured for use with a mattress which measures 750mm wide by 1310mm long and a maximum thickness of 120mm. The width and length are specified because it is important that the gaps between the mattress sides and ends of the cot will not exceed 40mm. This is to minimise the risk of a child's limb becoming caught in the gap. The thickness of the mattress has been specified to ensure that the depth of the cot is greater than 500mm with the mattress base in the lower position to minimise the risk of a child climbing or falling out of the cot.

Warning:

- TO PREVENT FALLS OR SUFFOCATION THE MAXIMUM MATTRESS THICKNESS SHOULD NOT EXCEED 120MM.
- TO PREVENT FALLS, THE MATTRESS BASE OF THIS COT SHOULD BE ADJUSTED TO THE LOWEST POSITION BEFORE THE CHILD CAN SIT UP.
- Follow the manufacturer's assembly instructions in detail to ensure the safety features of the cot are not compromised.
- Ensure the cot is placed at a reasonable distance from curtains, blinds, heaters and power points.
- Keep cot free of any toys, cushions etc that could be used as a foothold or present a danger of suffocation or strangulation.
- Keep medication, String, elastic or small items such as money out of reach from any position in the cot.

FOR THE UK

(BS EN716-1:1996 BS EN716-2:1996)

IMPORTANT-RETAIN FOR FUTURE REFERENCE—READ CAREFULLY

RECOMMENDED MATTRESS SIZE 1310mm X 750mm x 110mm

If you leave the child unattended in the cot, always make sure that the dropside is in the highest position.

This cot has been manufactured for use with a mattress which measures 750mm wide by 1310mm long and a maximum thickness of 120mm. The thickness of the mattress has been specified to ensure that the depth of the cot is greater than 500mm with the mattress base in the lower position and 200mm with the mattress in the highest position to minimise the risk of a child climbing or falling out of the cot.

Warning:

- TO ENSURE THE SAFETY, REGULARLY CHECK ALL THE CONNECTING BOLTS AND GLIDE PINS MAKING SURE THEY ARE TIGHT, CARE SHOULD BE TAKEN THAT NO SCREWS ARE LOOSE BECAUSE A CHILD COULD TRAP PARTS OF THE BODY OR CLOTHING (EG. Strings, necklaces, ribbons for babies dummies), WHICH WOULD POSE A RISK OF STRANGULATION.
- TO PREVENT FALLS, THE MAXIMUM MATTRESS THICKNESS SHOULD NOT EXCEED 120MM.
- TO PREVENT FALLS, THE MATTRESS BASE OF THIS COT SHOULD BE ADJUSTED TO THE LOWEST POSITION BEFORE THE CHILD CAN SIT UP.
- Follow the manufacturer's assembly instructions in detail to ensure the safety features of the cot are not compromised.
- Ensure the cot is placed at a reasonable distance from curtains, blinds, power points, heaters and sources of strong heat.
- Keep cot free of any toys, cushions etc that could be used as a foothold or present a danger of suffocation or strangulation.
- Keep medication, String, elastic or small items such as money out of reach from any position in the cot.

Maintenance of your Boori Cot

- TO ENSURE THE SAFETY OF YOUR COT, REGULARLY CHECK ALL THE CONNECTING BOLTS AND GLIDE PINS MAKING SURE THEY ARE TIGHT, CARE SHOULD BE TAKEN THAT NO SCREWS ARE LOOSE
- GLIDE PINS AND BOLTS SHOULD BE TIGHTENED EVERY FOUR TO SIX MONTHS TO ENSURE COT REMAINS STABLE
- TO CLEAN YOUR COT USE A SOFT CLOTH DAMPENED WITH WATER
- DO NOT USE STRONG HOUSEHOLD CLEANERS
- AVOID CONTACT WITH SHARP OBJECTS
- WHEN MOVING YOUR COT DO NOT DRAG, ALWAYS LIFT AND PLACE IN POSITION



Baby to Youth COT assembly instructions

★ **Note:** Due to the weight of this product assembly of this cot requires 2 people.

1 Attaching the cot feet


A: Lay cot end panels onto the floor to screw feet on.



B: Screw 4 x feet to end panel using 4 x G bolts. Make sure left and right feet are placed the correct way.



END PANELS WILL NOT FREE STAND WITH FEET ATTACHED

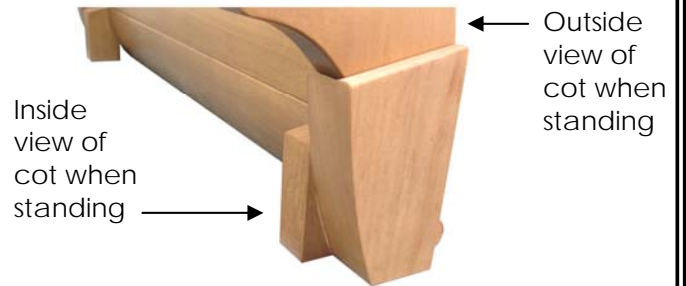


2 Assembling the base


NOTE: Base, Base side supports & Base extensions must face up.

Base side supports

Place 4 x B wooden dowels into base side supports and push base side supports onto base.

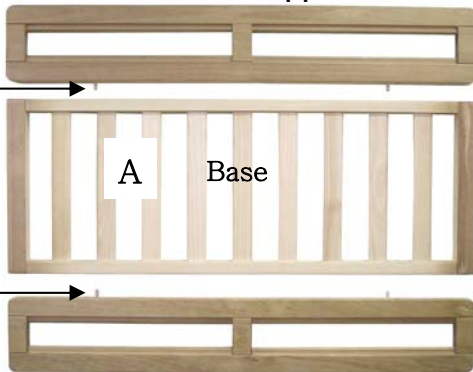


Screw base side supports to base using 4 x G bolts.

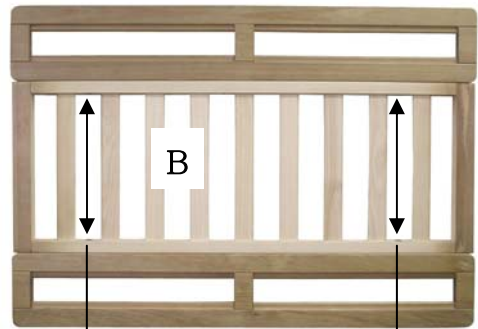


Place 8 x B wooden dowels into base extensions and push on to base.

Base extensions

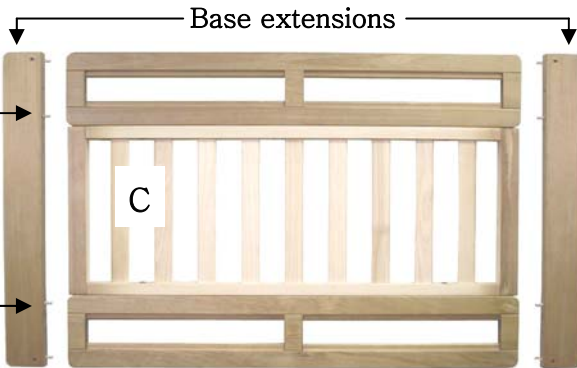

Push base extensions onto each end of the base.

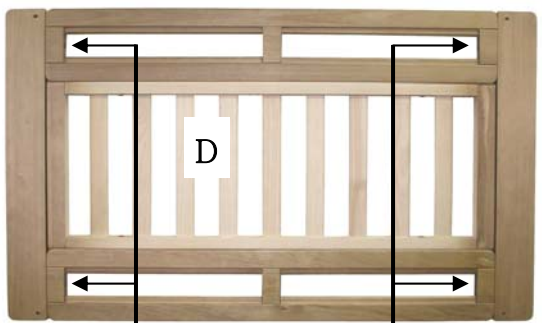

Screw base extensions onto each end of the base using 4 x J bolts.



Baby to Youth COT assembly instructions

3 Attaching the fixed side




Attaching the fixed side requires two people as end panels will not free stand.

Connect the fixed side panel to the end panels using 4 x I bolts. (DO NOT over tighten at this stage)

4 Placing base supports for newborn & baby positions

NOTE: Please place base supports on to end panels with pin facing up for base to sit on.

Newborn position

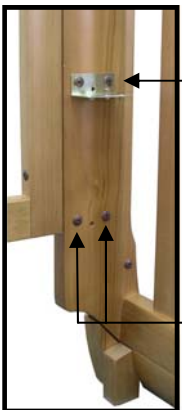


Place 4 x base supports, must have pin facing up.

Base at newborn position. Screw 4 x Base supports to end panel with 8 x C bolts.

Screw 8 x C bolts to cover remaining base holes.


Baby position

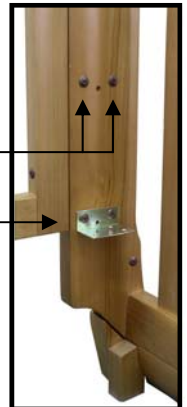

Screw 8 x C bolts to cover remaining base holes.

Base at baby position. This height should be used when your baby can sit up. Screw 4 x Base supports to end panel with 8 x C bolts.


5 Attaching the drop side

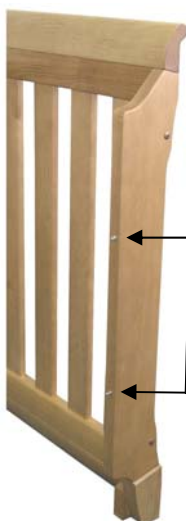

A: Screw 4 x A drop side glide pins firmly into the end panels using a Philips head screwdriver. (not supplied)



B: Push end panels outward to allow space for the assembly of drop side panel. Allow glide pins of one end panel to attach into the runner on drop side first, then allow the pins on the other side to slide into runner and pull both end panels inward. Tighten all bolts in fixed side panel.



C: Fully screw in blocking bolts on both end bars of drop side panel.





Baby to Youth COT assembly instructions

6

Lowering base into cot

NOTE: Make sure base is facing up.



Lower the base into the cot and place onto base supports making sure the base is facing up. Screw onto base supports using 4 x E bolts.



7

To operate drop side panel



TO LOWER THE DROP SIDE PANEL pull the drop side up to the highest position. Hold it in that position while using your leg to push (at the centre bottom bar) inward. Then allow the drop side panel to slide down. To raise the drop side panel, pull the drop side panel up from the centre of top bar until it clicks into the locking position.

8

Lowering the base height for baby position



Newborn position

The base should be lowered to the baby position before the child can sit up




Baby position

A




Unscrew 4 x E bolts from base supports and lift out base.

B

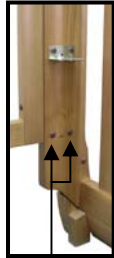

Unscrew 8 x C bolts from lower base holes.

C

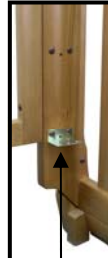


Move base supports to lower level and lower base onto base supports.

D



Re-use 4 x E bolts to screw base to base supports.

E

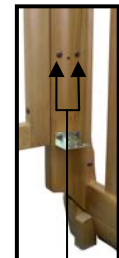

Re-use 8 x C bolts to cover remaining base holes.



B 2 Y Cot to King Single Bed



From Baby



To Youth

REMAINING BOXES

PLEASE STORE YOUR REMAINING BOXES
FOR YOUR KING SINGLE BED IN A DRY
SAFE AREA FOR FUTURE USE