

Driver SP
gr. 1

Ferrari

OFFICIAL LICENSED PRODUCT

Made in France by **TEAM TEX**

Rue du Claret - Z.I. de Montbertrand

38230 Charvieu - France

Tél. +33 (0)4 72 46 98 98 - Fax +33 (0)4 72 46 98 70

V5808



Ferrari

SAFETY ADVICE

PLEASE READ THOROUGHLY BEFORE COMMENCING INSTALLATION AS AN
INCORRECT INSTALLATION COULD BE DANGEROUS

Do NOT use this child seat in passenger seats equipped with Airbags. It must be installed in a forward facing position with a 3 point safety belt in compliance with standard R 16 or other equivalent standards. Do not use on side facing or rear facing vehicle seats. Never use this child seat without fastening the child's harness correctly, and never attempt to use it without fastening it into the car as described in these instructions. It is important that the car seat belts are perfectly tightened and that the lap section is routed as low as possible on your child's hips. Ensure that the belt straps are not kinked or twisted. The child seat must be tightened down the upholstery as tight as possible to ensure maximum protection : the recommended method is shown in these instructions. Do not add to or modify the seat in any way. It is recommended that this car seat should be changed when it has been subjected to violent stresses in an accident or has become badly worn. Periodically inspect the harness for wear, paying particular attention to the attachment points, stitching and adjusting devices. Do not leave you child unattended in the seat at any time. Ensure that no part of the seat is trapped in a door or folding seat. If your car has a folding rear seat, ensure that it is correctly latched in the upright position. Car interiors can become very hot when in direct sunlight: it is therefore recommended that the child seat is covered when not in use. This prevents components, particularly those attached to the child's seat, becoming hot and burning the child. Do not use the child seat without its seat cover, which should not be replaced with any other than the one recommended by the manufacturer. In case of an emergency it is important that the child can be released quickly: this means that the buckle is not fully tamper-proof, so your child must be taught never to play with the buckle. Luggage and other heavy or sharp objects should be secured in the car: loose objects are liable to cause injury in the event of an accident.

NOTICE

1 - This is a "Universal" Child restraint. It is approved to Regulation N°44 series of amendments, for general use in vehicles and it will fit most, but not all, car-seats.


2 - A correct fit is likely if the vehicle manufacturer has declared in the vehicle handbook that the vehicle is capable of accepting a "Universal" child restraint for this age group.

3 - This child restraint has been classified as "Universal" under more stringent conditions than those which applied to earlier designs wich do not carry this notice.

4 - Only suitable if the vehicle is fitted with a type approved 3 point static or retractor safety belt in compliance with standard UN/ECE 16 or other equivalent standards.

5 - If in doubt,consult either the child restraint manufacturer or the retailer.

I Contents

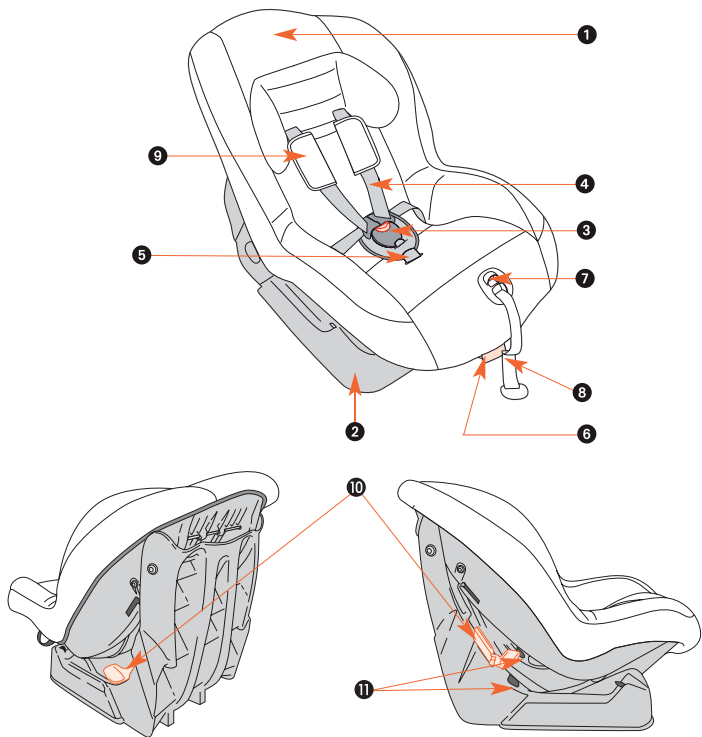


This seat is classified as group 1 for children from 9 to 18 kg (9 months to 4 years approx.).


- | | |
|-----------------------|---------------------------|
| 1 Shell + cover | 7 Harness release button |
| 2 Base of seat | 8 Harness adjuster |
| 3 Buckle | 9 Shoulder pads (x2) |
| 4 Shoulder straps | 10 Red belt lock-off (x2) |
| 5 Crotch strap | 11 Lap belt guides (x2) |
| 6 Seat reclining lock | |

II Fitting your child seat into your car

OK

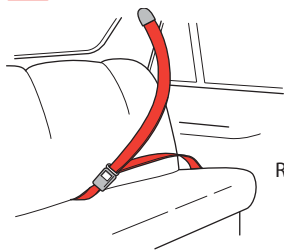

NO

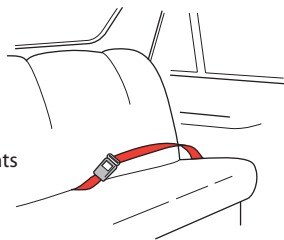

Rear seats

OK

*



Front seat





* Always give preference to rear seats, even if the highway code allows installation at the front.

Your car seat must only be installed forward-facing using a 3 point lap and diagonal seat belt in the front or rear passenger seats of the vehicle.


The car seat is only suitable if the vehicle is fitted with a 3 point static or 3 point retractor safety belts, approved to UN/ECE Regulation No. 16 or other equivalent standards.

II Fitting your child seat into your car


1. Fully recline the seat. To recline the seat, lift the seat recline button up and pull the front of the car seat forward and up as far as it will go. Thread the lap and diagonal sections of the car seat belt until fully extended and feed both through the space between the shell and the base. Fasten the seat belt.

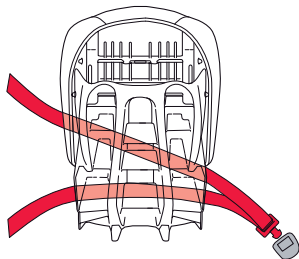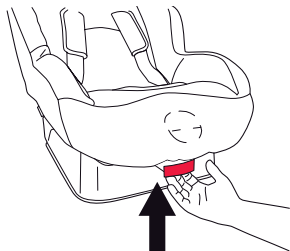

2. Thread the diagonal and lap sections through the guides located below the red lock-off clips. Open the red lock-off clip next to the buckle, then route the diagonal section of the belt through the open lock-off clip.

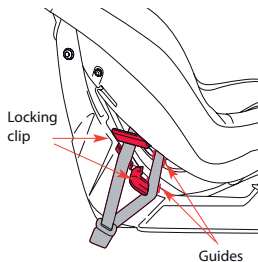


3. Push the child seat right down into the vehicle's seat, and tighten both sections of the seat belt. Close the lock-off clip across the diagonal belt. Check that there are no kinks or twists in the seat belt. You must only use the lock-off clip located next to the buckle.

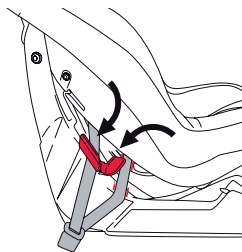


III Harness & buckle

Securing the safety harness:
Connect the two top sections of the buckle. Then push the tongues into the buckle on the crotch strap.




Opening the safety harness:
Push down the button on the buckle.




IV Adjusting the safety harness


1. Always check the height of the safety harness shoulder straps. Place the child into the car seat and fasten the harness. The shoulder straps **MUST** be in the position closest to the top of the child's shoulder. Adjust the shoulder height of the harness in one of the three positions if necessary.



2. To tighten the harness: Pull gently on the harness adjuster to take up any slack in the harness. **WARNING:** a loose harness is dangerous: it is recommended that there is just enough room to insert two fingers between the shoulder straps and the child's chest.




3. To loosen the harness : press the harness adjustment button down while pulling both shoulder straps forward. Do not pull on the shoulder pads which are fixed in length.




V Adjusting the height of the harness


1. Fully recline the seat, see page 6. Loosen the harness in order to access to the metal yoke at the back of the seat.

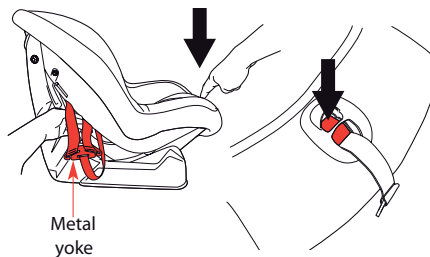


2. Remove one of the shoulder straps from the metal yoke.



3. Feed the shoulder strap that has been undone through the shoulder slot in the back of the shell and the cover. It is not necessary to feed the strap through the shoulder pad.

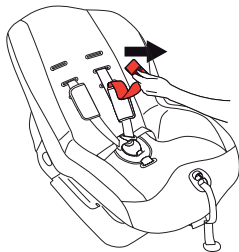

4. Pull back the top part of the seat cover and white liner. Release the metal keeper of the shoulder restraint by feeding it back through the slot, and through the liner and cover.



V Adjusting the height of the harness


7. Re-assemble the harness by threading the keeper of the shoulder restraint back through the desired slots in the cover, liner and seat. Important: Make sure you thread the keeper back into the slot below.

Feed the shoulder strap back through the same slot and re-attach onto the metal retaining yoke.

- Note: when moving the harness to the top slots, you must move the seat into the most upright position before feeding the keeper through the slot. At the rear of the seat, then push the keeper down through the gap between base and seat. Then fully recline the seat again to be able to feed the keeper back through the slot below.


Repeat the process to re-attach the shoulder strap onto the metal yoke.

Repeat the same procedures for the shoulder strap and restraint on the other side. Make sure there are no kinks or twists in the straps. When completed, replace cover on seat shell..

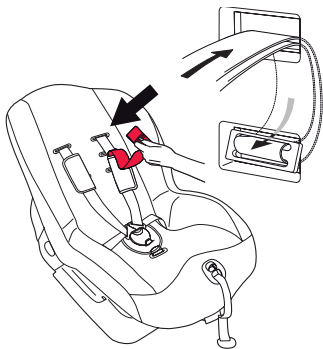

VI User guide

It is important to refer the safety advices. Read these instructions carefully and retain this user guide in the pocket on the cover for future reference. An incorrect installation could be dangerous.



VII Care of your product & consumer service

The fabric cover can be removed from the seat. In case of light soiling, sponge with a mild detergent and warm water, or hand-wash at 30°. Do not use chemical cleaners, do not machine-wash, do not tumble-dry, do not iron. If you need assistance, spare parts or if you are unhappy with any aspect of the goods, please contact:

TEAM-TEX

Rue du Claret - Z.I. de Montbertrand
38230 Chavieu-Chavagneux - FRANCE

Tel: +33 (0)4 72 46 98 98 - Fax: +33 (0)4 72 46 98 70

