

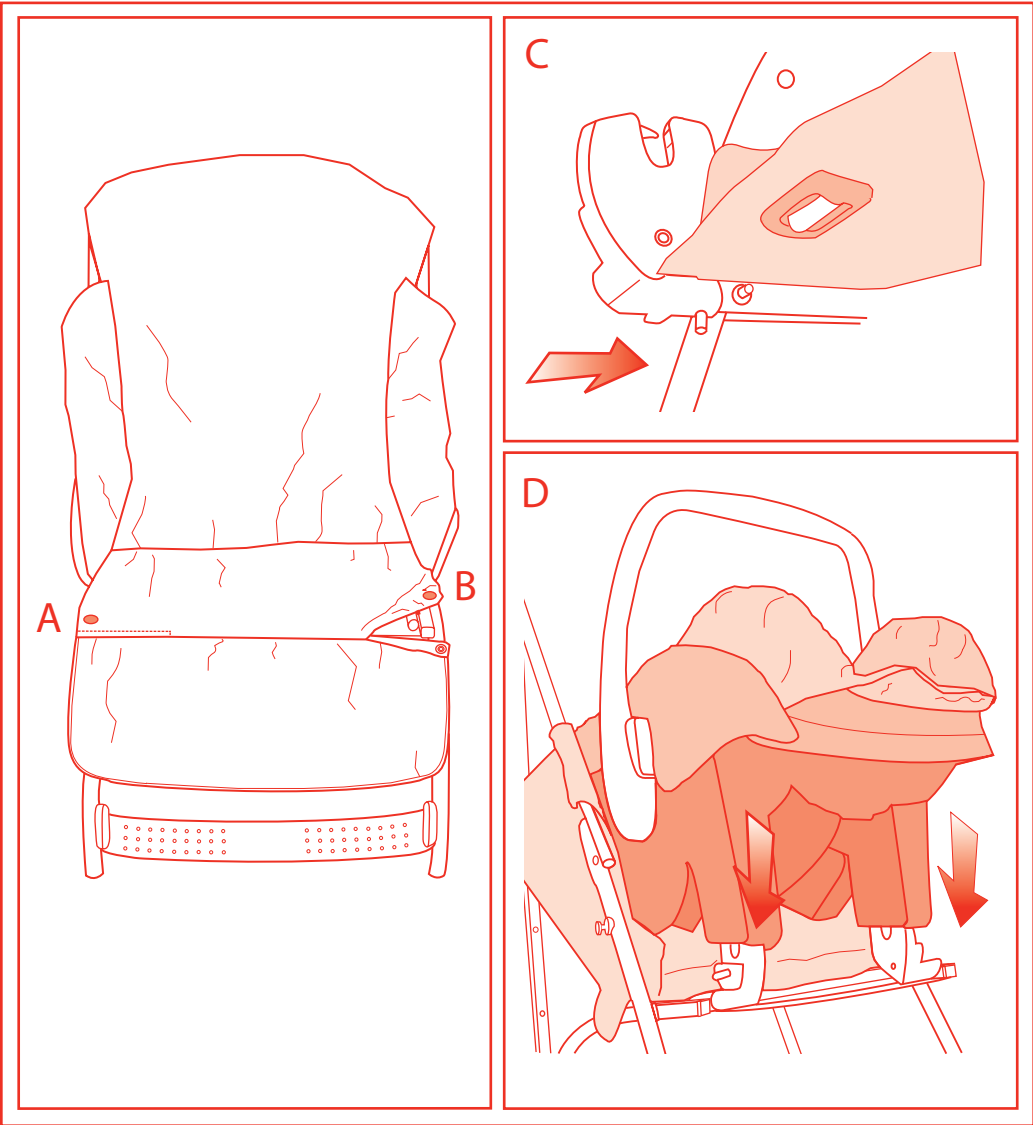
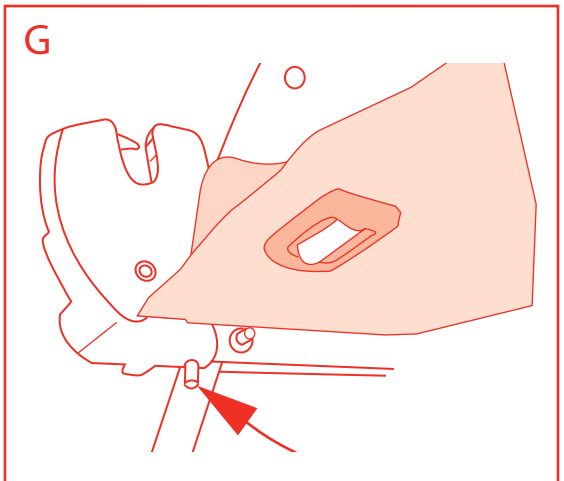



# MACLAREN

*techno xlr car seat adapter*  
*techno xlr car seat rain apron*

*(for use with the Recaro® Young Profi Plus Group 0/0+ Car Seat)*

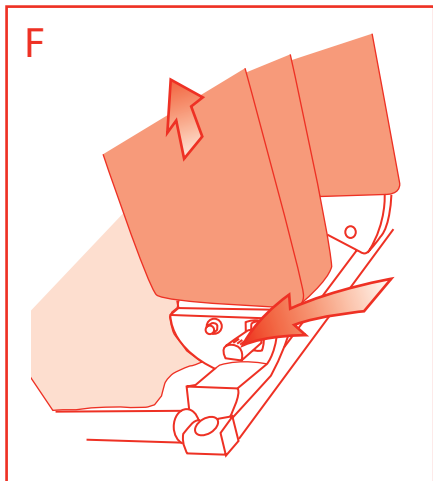

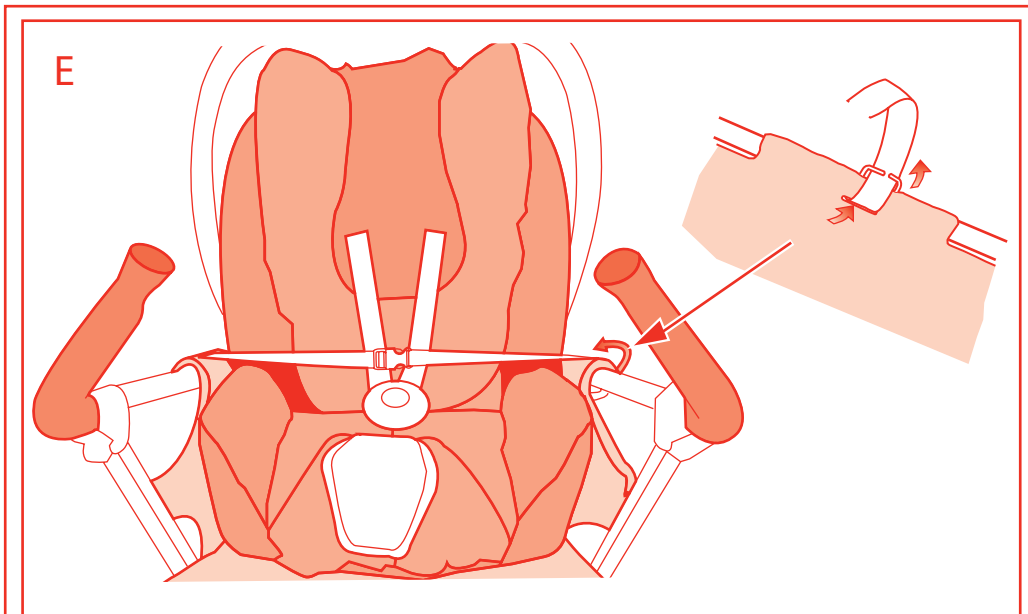

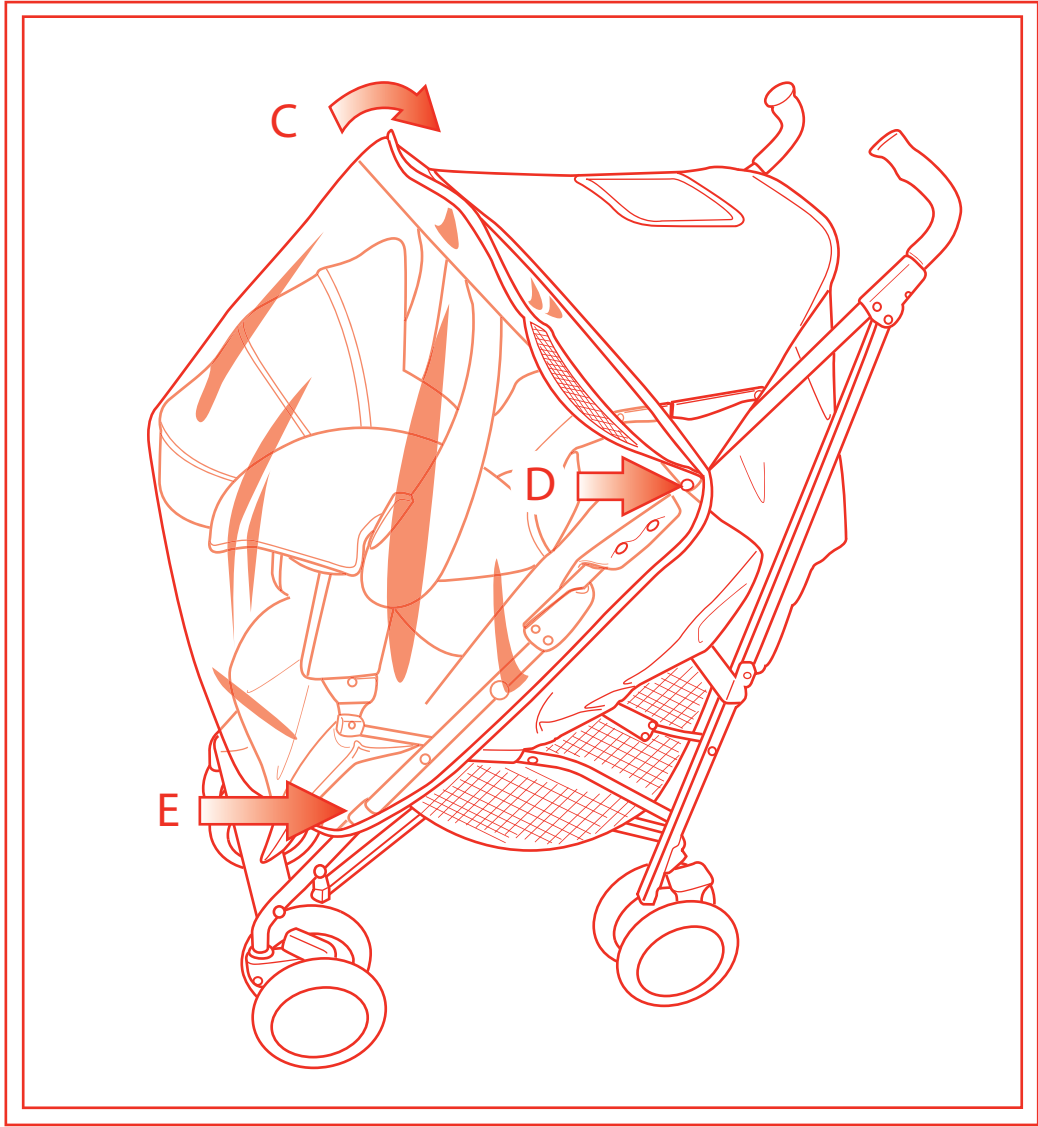

## Warranty

Your Maclaren stroller is guaranteed to be free from any manufacturing defects for a period of 1 year from the date of purchase under normal use and provided it is used in compliance with the operating instructions. This warranty extends only to the original retail purchaser and is only valid when supplied with proof of purchase. Please retain proof of purchase with this Limited Warranty.

Should a repair be needed please contact the retailer from whom the product was purchased, or one of the Maclaren Authorised Service Agents.

Please note that the warranty will not be applicable if:

A fault is the cause of misuse or poor maintenance.  
Please refer to this instruction leaflet for guidance on how to maintain your stroller.

Repairs are carried out by a third party.

The stroller is faulty due to general wear and tear which is the result of everyday use.

A stroller is damaged as a result of an accident.

Maclaren are not satisfied that the stated warranty terms and conditions have been met.

THIS WARRANTY IS GIVEN IN ADDITION TO AND DOES NOT AFFECT  
YOUR STATUTORY RIGHTS

# Contents

- 3 EN** ***Attendant user guide***  
Please read this User Guide fully prior to use ensuring reference is made to the numbered diagrams on the final pages.  
*Retain this User Guide for future reference*
- 6** **Operation Illustrations**
- 9** **Warranty Information**

# EN

## ATTACHING THE CAR SEAT

Ensure that the buggy seat is in the first recline position.

### To fit the adapter clips:

Attention: There is a left hand and a right hand clip, ensure that the adapters are the correct way round

- A Undo the poppers on either side of the seat cover
- B Pull the fabric away to reveal the adapter attachment poles.
- C Connect the adapters clips to the poles located next to the legrest extenders under the zip opening on either side of the buggy, slide the adapter clip onto the pole, the pin on the bottom of the pole should click into the hole on the bottom of the adapter.

**Attention:** *The front of the car seat should be facing the front of buggy seat.*

### To attach the car seat:

- D Line the adapter clips up with the holes on the bottom of the car seat and push seat down into place. Seat will click when secured into place.
- E Secure the seat with the retainer straps located on the side bars on either side of the buggy, secure the retainer strap over the car seat using the clasp, ensure that the strap is pulled tight to secure the car seat.

**CAUTION:** *The security of the fixing should be checked by pulling up on the car seat handle before putting the baby into the seat.*

**WARNING:** *Do not lift product and child by using the car seat handle*

### To detach the car seat:

- F Push down both levers located on the outside of the attachment clip and lift the seat away from the buggy.

### To detach the adapter clips

- G Push in the button on the underside of the seat tube and slide the adapter clip away from the pole.

## TO FIT THE CAR SEAT RAIN APRON

- A Return hood to non-tilted position before fitting rain apron.
- B Ensure visor is folded away beneath the hood.
- C Place the apron over the hood front.
- D Attach two eyelets (one each side) to the hood clips.
- E Attach front straps to front legs just below seat.